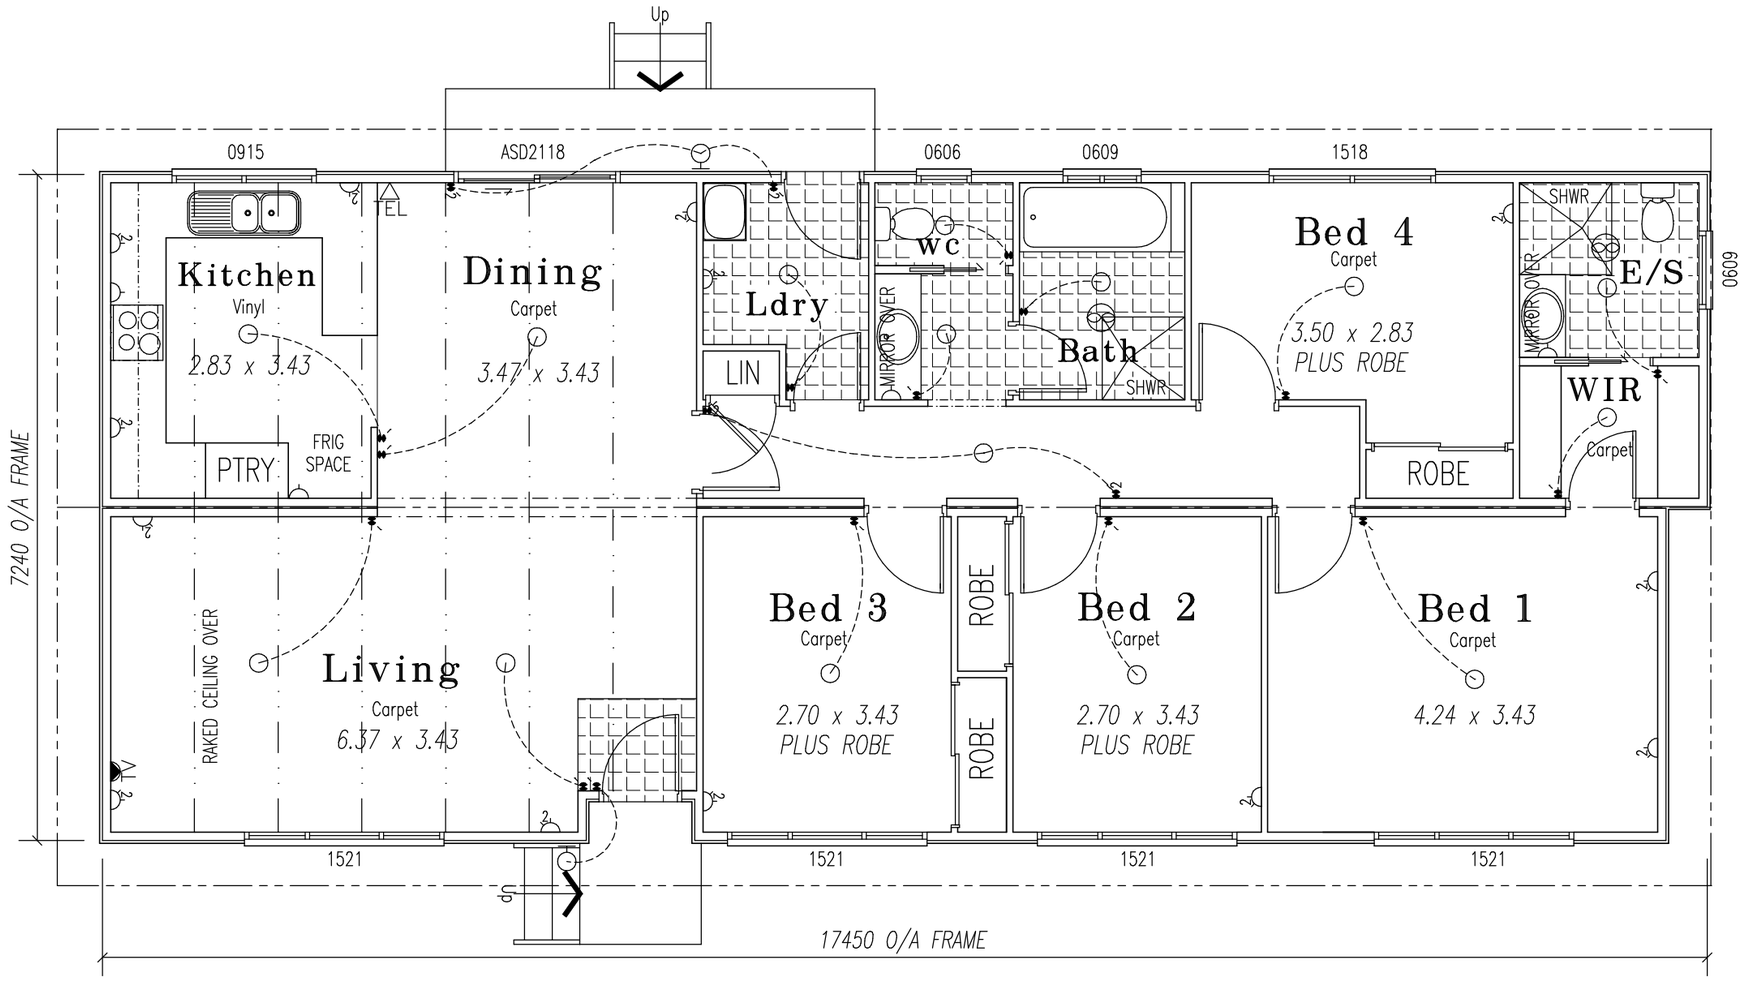

FLOOR PLAN

HARNETT
TRANSPORTABLE HOMES

ORANA 4 + En Suite

17.45 x 7.24m
124.17 sq.m. – 13.37 Squares

COLORBOND CUSTOM ORB ROOF SHEET
14° PITCH

COLORBOND FASCIA, GUTTERS & DP's

ALUMINIUM WINDOWS WITH FLY SCREENS

PAINTED EXTERNAL LININGS

INSULATION TO ROOF & EXTERNAL WALLS

STEEL FLOOR SYSTEM

H2 TREATED PINE FRAMES & TRUSSES

COMPRESSED FIBRE-CEMENT SHEET TO SHOWERS

DO NOT SCALE

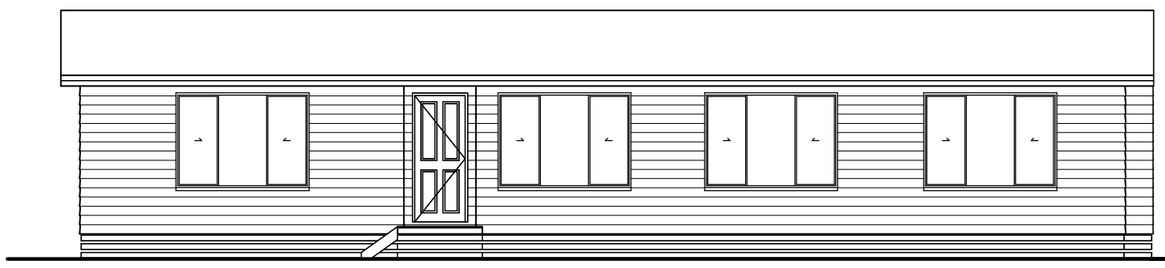

FRONT ELEVATION

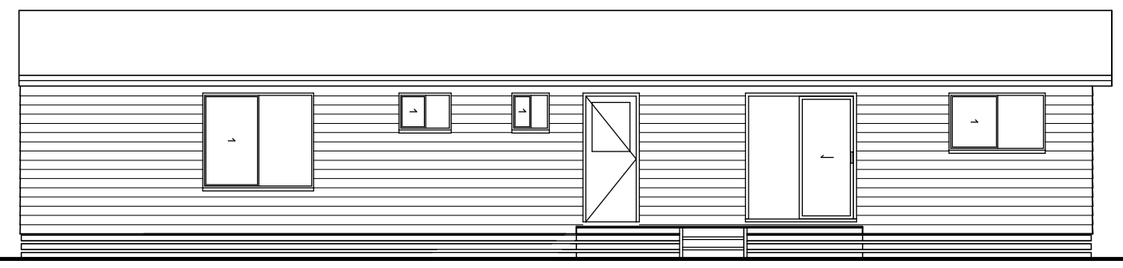

REAR ELEVATION